

## 1613 SMD Package Bi-Color LED

### VS 372D8

#### Description

This is Bi-Color SMD LED series with dimension 1.6 mm (L) \* 1.3 mm (W) \* 0.4mm (H) The unique of these LEDs are made from AlGaInP and InGaN chips that provide high luminous intensity at low driving current. The lens design provides 120 degree viewing angle and suitable for backlighting purpose. The available colors are Red/Yellow, Yellow/Green or even Red/Blue. Any color combinations specified by customers can be accepted.



#### Applications

- Industrial control systems signal indicator
- Automotive features
- Front panel indicator
- Status indication



#### Electronic Optical Characteristics (at 20mA):

Part Number	Emitted Color	$\lambda$ (nm)		Iv(mcd)		VF(Volt)		View Angle	Lens
		$\lambda_d$	$\lambda_p$	Min	Typ.	Typ.	Max.		
VS 372D8	Red 	624	632	71	105	2.0	2.4	120	Clear
	Blue 	470	468	45	82	3.5	4.0		

#### Absolute Maximum Ratings (at Ta=25°C)


Emitted Color	P <sub>D</sub> (mW)	I <sub>F</sub> (mA)	I <sub>FP</sub> (mA)	Iron Solder(°C)	I <sub>R</sub> @V <sub>R</sub> =5V	T <sub>opr</sub> (°C)	T <sub>stg</sub> (°C)
Red	60	25	60*	350 ± 5 for 3 sec.	10	-40~+85	-40~+90
Blue	95	25	60*		10	-40~+85	-40~+90

Note: Please take note the Absolute Maximum Rating values. Any operation beyond the specified ratings in this table will result degradation of LED life-span and may cause LED to fail.

\* Peak forward current (duty 1/10 at 1KHz)






**Package Dimension:**


unit:mm

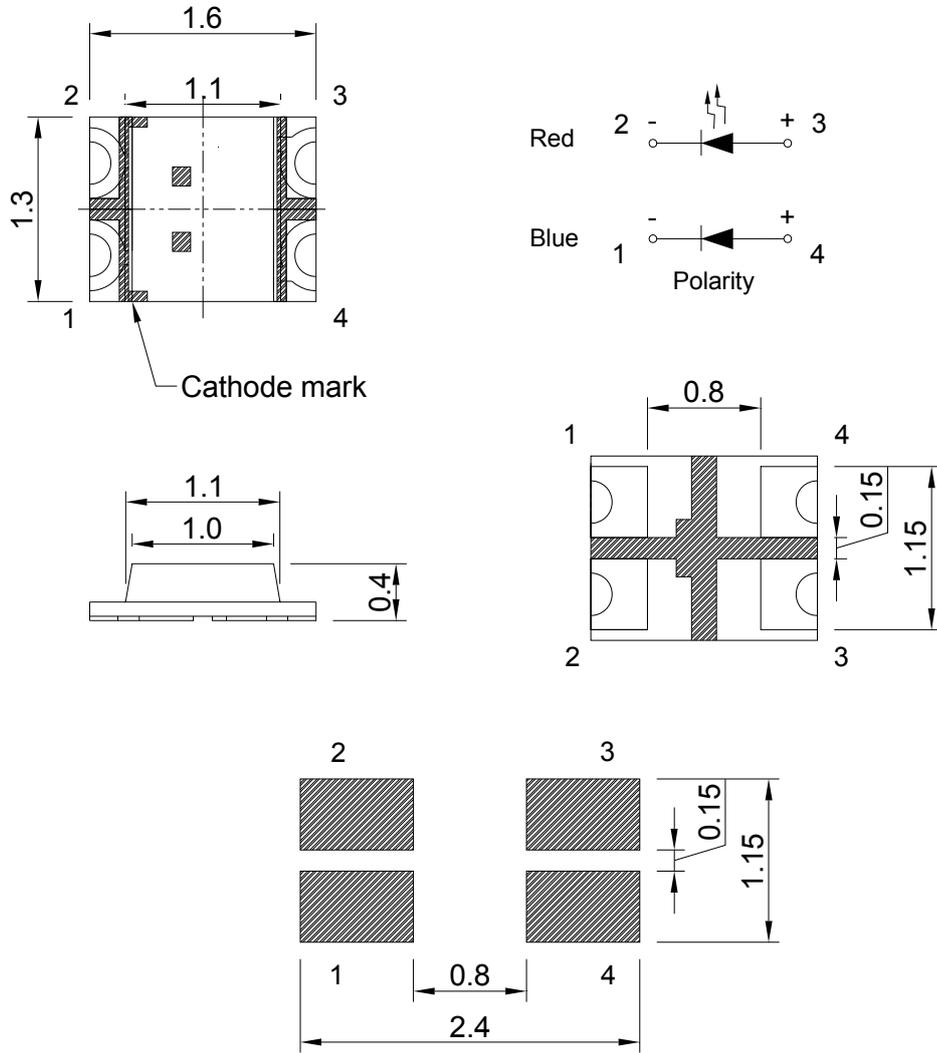
**Recommended Soldering Pad**
**Notes:**

1. All dimensions are millimeters.
2. Tolerance is  $\pm 0.2\text{mm}$  unless otherwise specified.
3. Specifications are subject to change without notice.


### Optical Characteristics Curves

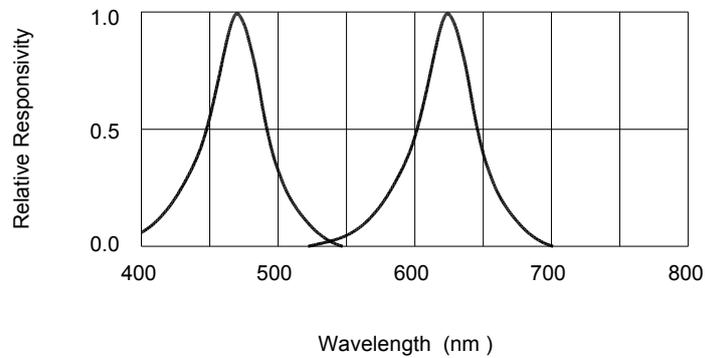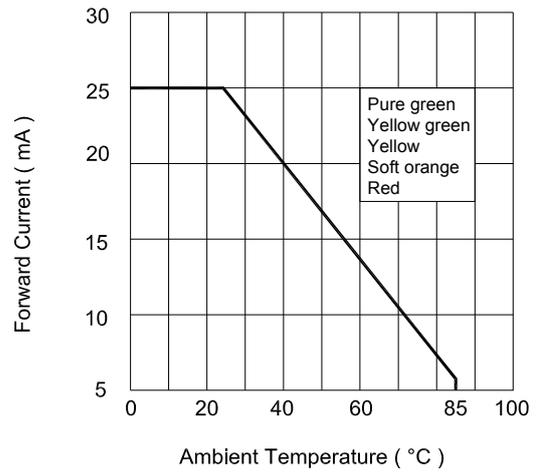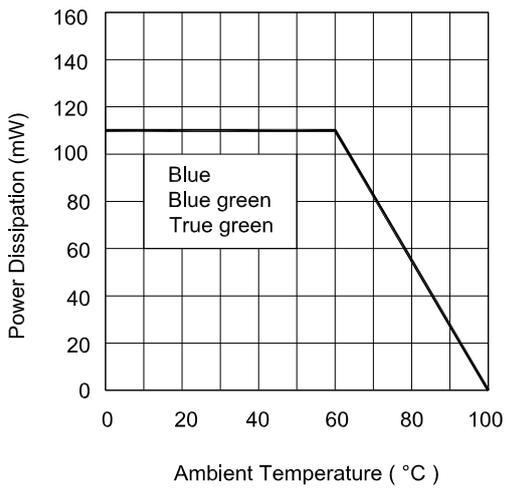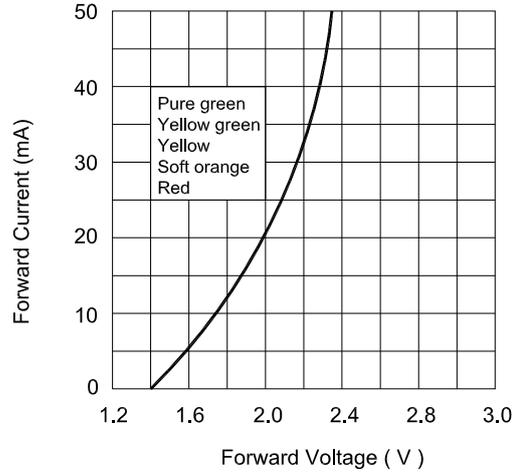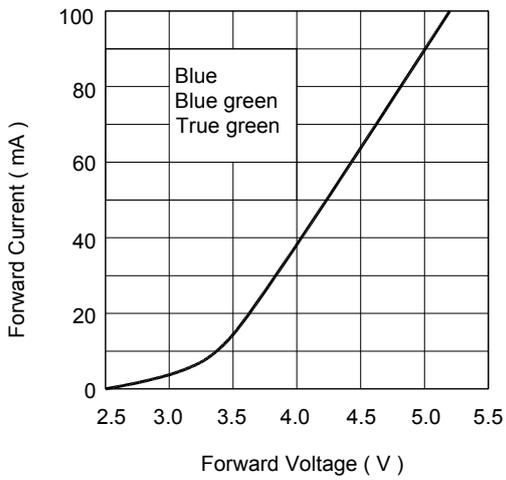

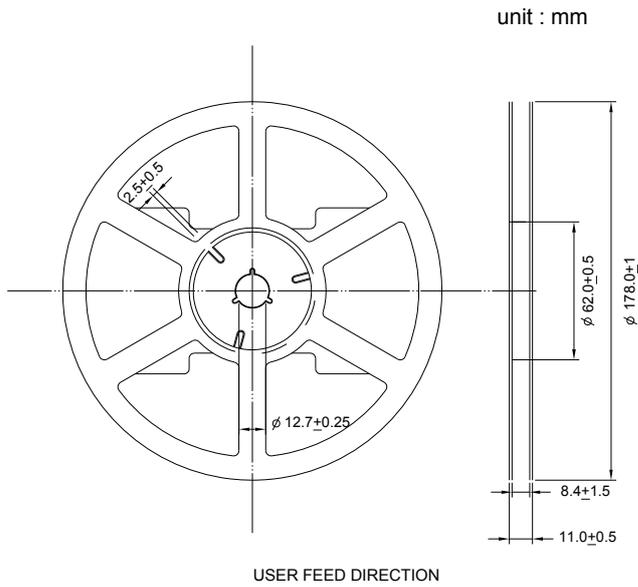**Reel Dimension:**


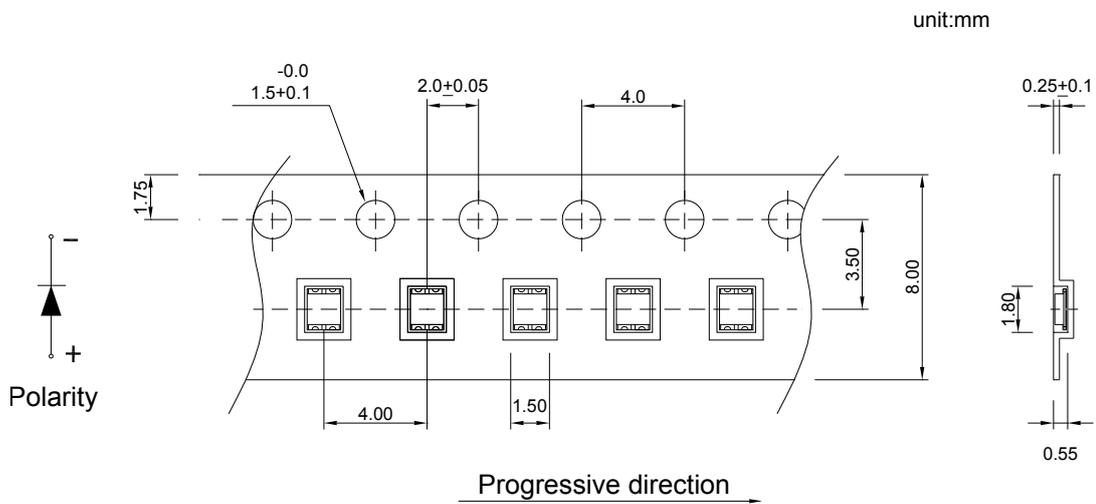
**Note:**



Available in 8mm carrier tape on 178mm diameter reels. (2000 pieces)

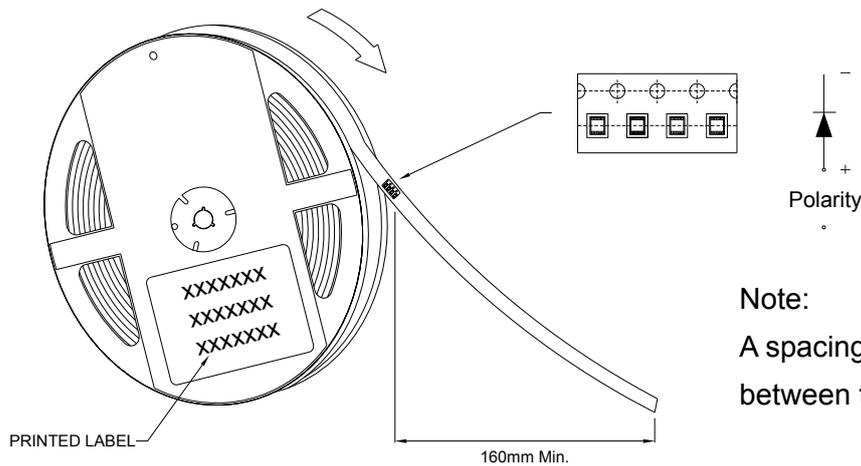

**Note:**

A spacing of approximately 160mm between the front edge of tape

**Tape Dimension:**

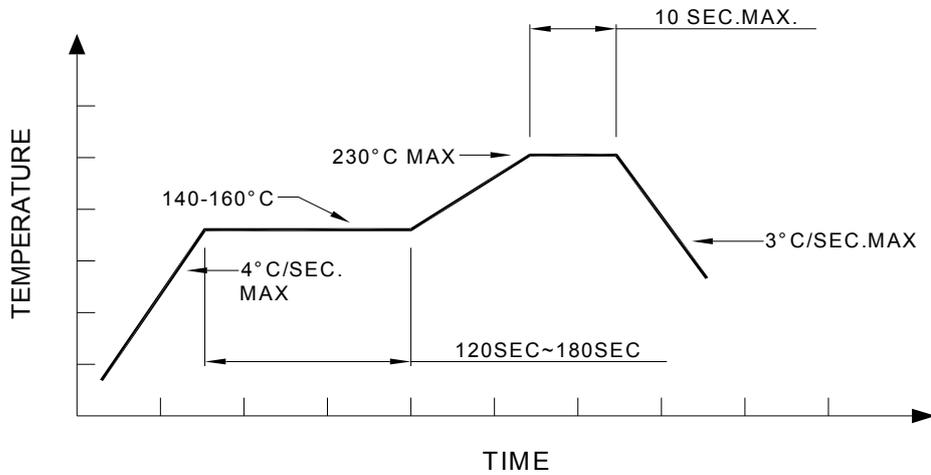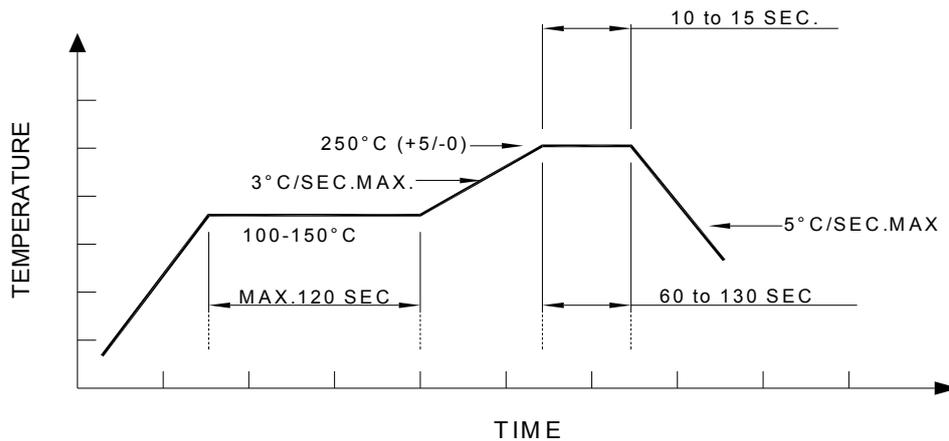
**Recommended re-flow soldering profile:**

**Recommended Pb-free re-flow soldering profile:**

**Note:**

All the specifications listed in this data sheet are suitable for general electronic equipment, office equipment and communication devices. Kindly consult Sales Representatives for specific reliabilities request, Forward Voltage, Luminous Intensity, Wavelength, Radiant Power or Viewing Angle.